



SUBMERSIBLE LEVEL TRANSMITTER WITH SLUDGE NOSE



Model BR1112/1113
Submersible Level Transmitter
with Sludge Nose

MODEL BR1112/1113

FEATURES:

- Removeable stainless steel sludge nose
- Submersible to 700 ft WC (211 meters WC)
- 1.06" (27 mm) diameter
- Up to ± 0.2 % FSO accuracy
- All stainless steel construction
- 0-5Vdc and 4-20mA output

APPLICATIONS:

- Wet wells, ponds, rivers and tank level measurements
- Water and waste water treatment
- Ground water monitoring
- Irrigation

PRODUCT OVERVIEW:

The Model BR1112/1113 from Blue Ribbon Corp is a family of submersible level transmitters, designed to provide high-accuracy measurements at a competitive price point. They are offered with an all stainless steel sensor with removeable sludge nose which allows for periodic maintenance and cleaning for extended corrosion-free service life.

FIELD OPTIONS:

- 0-5, 0-10, and 1-5Vdc output
- Additional cable lengths available
- Optional tantalum sensor

BR5SL-TX-028
REV-C


SUBMERSIBLE LEVEL TRANSMITTER WITH SLUDGE NOSE

DIMENSIONAL DRAWING

All dimensions are in inches (mm)

STANDARD WIRING

WIRE	MODEL 1113
RED	+EXC/SIG
YEL	-EXC/SIG
DRAIN	CASE GND

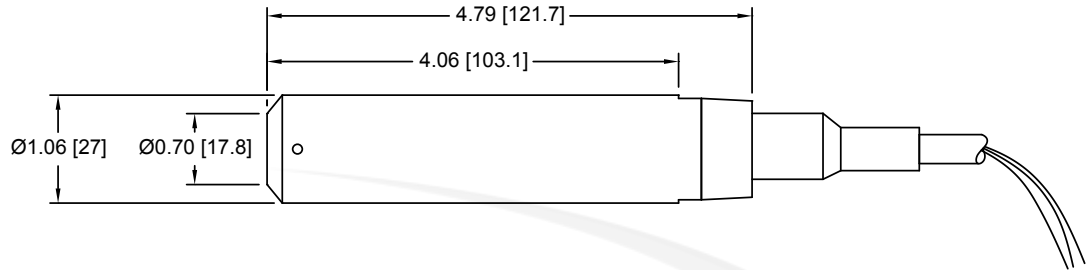

REFERENCE SPECIFICATIONS

ELECTRICAL	MECHANICAL
<ul style="list-style-type: none"> • Supply Voltage: 12 to 36 Vdc • Output Signal: (1112) 0 to 5 Vdc (1113) 4-20 mA • Circuit Protection: Lightning and surge protection • Response Time: <5 ms 	<ul style="list-style-type: none"> • Proof Pressure: 2X FSO • Burst Pressure: 3X FSO • Weight: > 1.5 lbs (680 g) • Diameter: 1.06" (27 mm)
STATIC ACCURACY (RSS) (HYSTERESIS, NON-LINEARITY & REPEATABILITY @ +70 °F) Standard: ±0.5% FSO Improved: ±0.2% FSO	PRESSURE RANGES <ul style="list-style-type: none"> • 0 to 2 PSI thru 0 to 300 PSI (138 mBAR thru 21 BAR) • 0 to 5 ft WC thru 0 to 700 ft WC (1406 mm thru 211 m WC)
MATERIALS OF CONSTRUCTION <ul style="list-style-type: none"> • Housing Assembly: 304SS • Sensor Diaphragm: 316L, tantalum optional • Cable: 40 ft Polyurethane jacketed cable with integrated vent tube and hydrophobic filter, Teflon cable optional • Process Connection: Stainless steel bullet nose (via M22x1 Female thread) 	THERMAL SPECIFICATIONS <ul style="list-style-type: none"> • Compensated: 32 °F to +168 °F (0 °C to +70 °C) • Operating Temperature: -40 °F to +185 °F (-40 °C to +85 °C) • Storage: -40 °F to +195 °F (-40 °C to +90.6 °C) • Effect on Zero: <±1.38% FSO/100 °F (<±2.5% FSO/100 °C) • Effect on Span: <±1.1% FSO/100 °F (<±2.0% FSO/100 °C)

All specifications are for reference purposes only. In the interests of continuous product improvement, all specifications are subject to change without notice. Please contact Blue Ribbon Corporation for assistance with your application.

