

# **DIFFERENTIAL PRESSURE TRANSMITTER**



Model BR306
Differential Pressure Transmitter

# **MODEL BR306**

## **FEATURES:**

- Low-cost, easy installation
- $\pm 0.5\%$ , 1.0%, 2.0% and 3.0% FSO accuracy
- Aluminum or stainless steel construction
- NEMA 4x/IP65 rated
- External Zero and Span adjust
- 4-20 mA output
- Pressure ranges from 0.4" WC to 14.5 PSI

## **APPLICATIONS:**

- Air and non-combustible compatible gases
- Air volume
- Boilers
- Underground ventilation
- Filter monitor
- Duct pressure

## PRODUCT OVERVIEW:

Model BR306 from Blue Ribbon Corp is a low cost, industrial grade differential pressure transducer with aluminum or stainless steel wetted parts and housing. Typical applications for the Model BR306 include boiler, ventilation, and air handlers.




Toll Free: +1.877.774.4751 Tel: +1.716.773.9300 Fax: +1.716.773.5019 Email: BRsales@blueribboncorp.com Web: www.blueribboncorp.com

# **DIFFERENTIAL PRESSURE TRANSMITTER**

## DIMENSIONAL DRAWING

All dimensions are in inches (mm)

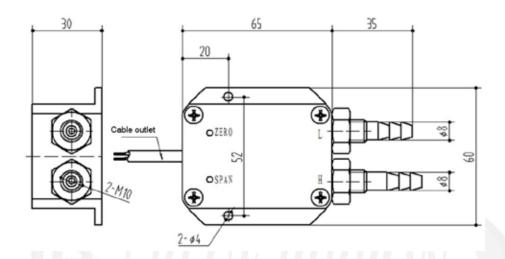

## REFERENCE SPECIFICATIONS

## ELECTRICAL

Supply Voltage: 16 to 36 Vdc
Output Signal: 4-20mA
Ingress Protection: IP65

• Response Time: 1 sec.

• Connection: 36" long, 24 AWG, 4 conductor cable

#### STATIC ACCURACY

1.5PSI to 14.5PSI: ±0.5% FSO
0.75PSI to 1.0PSI: ±1.0% FSO
2.0" WC to 8.0" WC ±2.0% FSO
0.4" to 1.0" WC ±3.0% FSO

### MATERIALS OF CONSTRUCTION

• Housing & Wetted Parts: Aluminum (optional stainless steel)

© 2020 Blue Ribbon Corp. | 2770 Long Rd, Grand Island, NY 14072 USA

### MECHANICAL

• Process connection: M10 thread

Proof Pressure: 2X FSOZero/Span adjustment

• Vibration: 20G (20~500HZ)

• Shock: 100g (11ms)

• Long-term stability: ±0.2% FSO/year

## **PRESSURE RANGES**

• 0.4" WC to 14.5 PSI Differential Pressure Reference

### THERMAL SPECIFICATIONS

• Operating Temperature:  $15 \,^{\circ}\text{F}$  to  $+140 \,^{\circ}\text{F}$  (-10  $^{\circ}\text{C}$  to  $+60 \,^{\circ}\text{C}$ )

• Storage: -40 °F to +250 °F (-40 °C to +121 °C)

All specifications are for reference purposes only. In the interests of continuous product improvement, all specifications are subject to change without notice. Please contact Blue Ribbon Corporation for assistance with your application.