



STAINLESS STEEL BALL VALVES



SS14 / SS16


1/4" (F) NPT X 1/4" (F) NPT

1/2" (F) NPT X 1/2" (F) NPT

SS Body Rating:

700 PSI at +250 °F

	SS14		SS16	
	IN	MM	IN	MM
DN	1/4"	6.35	1/2"	12.7
L	2.48"	63	2.55"	65
H	1.89"	48	1.96"	50
W	3.58"	91	3.66"	93

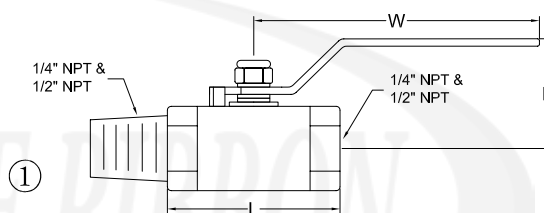

SS15 / SS17


1/4" (F) NPT X 1/4" (M) NPT

1/2" (F) NPT X 1/2" (M) NPT

SS Body Rating:

700 PSI at +250 °F

	SS15		SS17	
	IN	MM	IN	MM
DN	1/4"	6.35	1/2"	12.7
L	2.07"	52.5	2.13"	54
H	1.89"	48	2.13"	54
W	3.54"	90	4.33"	110

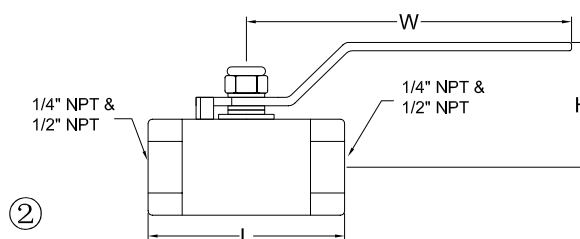

BR5SL-A-014
REV-A